


Receivers OEM617™



COMPACT, DUAL-FREQUENCY GNSS RECEIVER DELIVERS ROBUST RTK FUNCTIONALITY

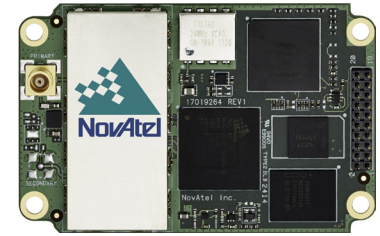

HIGH PRECISION GNSS, COMPACT SIZE

The dual-frequency OEM617 offers future ready, precise positioning for space constrained applications. Backward compatible with NovAtel's popular OEM615™ form factor, the OEM617 provides the most efficient way to bring powerful Global Navigation Satellite System (GNSS) capable products to market quickly.

DESIGNED WITH PERFORMANCE AND THE FUTURE IN MIND

The OEM617 tracks all current GNSS constellations including GPS, GLONASS, Galileo, BeiDou and QZSS. It features configurable channels to optimize satellite availability in any condition, no matter how challenging. The OEM617 is software upgradable to track future signals as they become available. Maximizing satellite availability and optimizing GNSS signal usage now, and in the future, ensures consistent, high performance GNSS positioning.

DESIGNED FOR FLEXIBILITY

The modular nature of NovAtel's OEM6® firmware gives users the flexibility to configure the OEM617 for their unique application needs. The OEM617 is scalable to offer sub-metre to centimetre-level positioning, and is field upgradable to all OEM6 family software options. Options include NovAtel CORRECT™ with RTK for centimetre-level real-time positioning, ALIGN® for precise heading and relative positioning, GLIDE™ for decimetre-level pass-to-pass accuracy, SPAN for continuous 3D position, velocity and attitude and RAIM for increased GNSS pseudorange integrity.

CUSTOMIZATION WITH AN API

Application Programming Interface (API) functionality is available on the OEM617. Using a recommended compiler with the API library, an application can be developed in a standard C/C++ environment to run directly on the receiver platform, eliminating system hardware, reducing development time and resulting in a faster time to market.

BENEFITS

- + Proven NovAtel technology
- + Easy to integrate
- + Low power consumption
- + API reduces hardware requirements and system complexity

FEATURES

- + Increased satellite availability with BeiDou, GLONASS and Galileo tracking
- + L1, L2, L2C, B1, B2, E1 and E5b signal tracking
- + GLIDE smoothing algorithm
- + RT-2®, ALIGN and RAIM firmware options
- + SPAN® INS functionality

If you require more information about our receivers, visit www.novatel.com/products/gnss-receivers/oem-receiver-boards/

For more information contact

NavtechGPS

Your ONE Source for GNSS Products and Solutions

+1-703-256-8900 or 800-628-0885
info@NavtechGPS.com
www.NavtechGPS.com

OEM617™

PERFORMANCE¹

Channel Configuration

120 Channels²

Signal Tracking

GPS	L1, L2, L2C
GLONASS	L1, L2
BeiDou ³	B1, B2
Galileo	E1, E5b
SBAS	
QZSS	

Horizontal Position Accuracy (RMS)

Single Point L1	1.5 m
Single Point L1/L2	1.2 m
SBAS ⁴	0.6 m
DGPS	0.4 m
NovAtel CORRECT	
» RT-2	1 cm + 1 ppm
Initialization time	< 10 s
Initialization reliability	>99.9%

Measurement Precision (RMS)

Fully independent code and carrier measurements:

	GPS	GLO
L1 C/A code	4 cm	8 cm
L1 carrier phase	0.5 mm	1 mm
L2 P(Y) code ⁵	8 cm	8 cm
L2 carrier phase ⁵	1 mm	1 mm
L2C code ⁵	8 cm	8 cm
L2C carrier phase ⁶	1 mm	1 mm

Maximum Data Rate⁷

Measurements	50 Hz
Position	50 Hz

Time to First Fix

Cold start ⁸	< 50 s
Hot start ⁹	< 35 s

Signal Reacquisition

L1	< 0.5 s (typical)
L2	< 1.0 s (typical)

Time Accuracy¹⁰ 20 ns RMS

Velocity Accuracy

0.03 m/s RMS

Velocity Limit¹¹ 515 m/s

PHYSICAL AND ELECTRICAL

Dimensions 46 × 71 × 11 mm

Weight <24 g

Power

Input voltage +3.3 V +5%/-3%

Power Consumption¹²

GPS L1/L2	<1.0 W
GPS/GLONASS L1/L2	1.1 W
all on	1.2 W

Antenna LNA Power

Input voltage	6 VDC-12 VDC
Output voltage	5.0 VDC
Max output current	200 mA

Connectors

Main	20-pin dual row male header
Antenna input	MCX female

COMMUNICATION PORTS

3 LVTTTL	up to 921,600 bps
2 CAN Bus ¹³	1 Mbps
1 USB	12 Mbps
Pulse Per Second (PPS) output	

ENVIRONMENTAL

Temperature

Operating	-40°C to +85°C
Storage	-55°C to +95°C

Humidity 95% non-condensing

Vibration

Random	MIL-STD 810G (Cat 24, 7.7 g RMS)
Sinusoidal	IEC 60068-2-6

Bump ISO 9022-31-06 (25 g)

Shock MIL-STD-810G (40 g)
Survival (75 g)

FEATURES

- Field upgradeable software
- Multi-path mitigating technology
- Differential GPS positioning
- Differential correction support for RTCM 2.1, 2.3, 3.0, 3.1, CMR, CMR+ and RTCA
- Navigation output support for NMEA 0183 and detailed NovAtel ASCII and binary logs
- Auxiliary strobe signals, including a configurable output for time synchronization and mark inputs
- Outputs to drive external LEDs
- GLIDE smoothing algorithm

NOVATEL CONNECT™

NovAtel Connect is an intuitive configuration and visualization tool suite allowing comprehensive control of the OEM617 product.

- Easy to use wizards for positioning mode configuration and raw data collection
- Detailed GUI for comprehensive status information
- Plan view and playback files allow to monitor positioning and configuration history
- Remotely control and monitor the OEM617 over the internet
- Windows XP and Windows 7 platforms

FIRMWARE OPTIONS

- ALIGN
- RAIM
- SPAN

OPTIONAL ACCESSORIES

- GPS-700 series antennas
- ANT series antennas
- RF Cables—5 and 10 m lengths
- OEM6 Development Kit

For the most recent details of this product: www.novatel.com/products/gnss-receivers/oem-receiver-boards/oem6-receivers/

novatel.com

sales@novatel.com

1-800-NOVATEL (U.S. and Canada) or 403-295-4900

China
0086-21-54452990-8011

Europe 44-1993-848-736

SE Asia and Australia
61-400-883-601

Version 1 Specifications subject to change without notice.

©2014 NovAtel Inc. All rights reserved.

NovAtel, OEM6, SPAN, RT-2 and ALIGN are registered trademarks of NovAtel Inc.

GLIDE, OEM615, OEM617, NovAtel CORRECT and NovAtel Connect are trademarks of NovAtel Inc.

D19486 July 2014

Printed in Canada.



1. Typical values. Performance specifications subject to GPS system characteristics, US DOD operational degradation, ionospheric and tropospheric conditions, satellite geometry, baseline length, multipath effects and the presence of intentional or unintentional interference sources.

2. Tracks up to 60 L1/L2 satellites.

3. Designed for BeiDou Phase 2, B1 and B2 compatibility.

4. GPS only.

5. L2 P for GLONASS.

6. L2 C/A for GLONASS.

7. 50 Hz while tracking up to 20 satellites.

8. Typical value. No almanac or ephemerides and no approximate position or time.

9. Typical value. Almanac and recent ephemerides saved and approximate position and time entered.

10. Time accuracy does not include biases due to RF or antenna delay.

11. Export licensing restricts operation to a maximum of 515 metres per second.

12. Typical power consumption values.

13. User application software required.

