

KEY FEATURES

Full support for L1/L2 GPS + GLONASS,
E1 Galileo and B1 BeiDou

Support for L-Band/OmniStar

Low-profile Fuselage Mounting

Sub-centimeter phase center
repeatability

Fully certified for airborne installations

HIGH PERFORMANCE GNSS SUPPORT FOR AIRBORNE MAPPING AND SURVEYING

The Trimble AV37 GNSS Aviation Antenna has been designed to support centimeter level accuracy for airborne applications and track SBAS signals all in one compact design. It is fully certified by the FAA for aircraft installations.

ROBUST, CERTIFIED GNSS AVIATION ANTENNA

Mapping and surveying from the air using GNSS requires survey grade antenna technology in a compact and reliable form factor. The Trimble AV37GNSS Aviation antenna achieves this without compromising performance.

For more information contact

NavtechGPS

Your ONE Source for GNSS Products and Solutions

+1-703-256-8900 or 800-628-0885

info@NavtechGPS.com

www.NavtechGPS.com



TRIMBLE AV37 GNSS ANTENNA



TRIMBLE AV37 GNSS ANTENNA

PERFORMANCE


- L1/L2 GNSS + L-Band Frequency Tracking:
 - GPS: L1, L2
 - GLONASS: L1, L2
 - Galileo: E1
 - BeiDou: B1
 - SBAS: WAAS, EGNOS, QZSS, Gagan, MSAS, and OmniStar
- Quality signal tracking
- TNC female signal connector
- Small cross-sectional area to reduce wind loading
- Low voltage, low power consumption
- Integral low noise amplifier
- Powered by GNSS receiver via coaxial cable
- High gain for reliable tracking in difficult environments
- FAA airworthiness certificate supplied with each antenna

ELECTRICAL

Frequencies 1570 +/- 45 MHz
 1238 +/- 21.5 MHz
 Signal gain 43 dB
 Voltage 5 V DC to 15 V DC
 Polarization Right Hand Circular
 Axial Ratio 3 dB Max @ boresight
 Amplifier..... Noise Figure : 2.5 dBMax
 Impedance : 50 Ohms
 VSWR : ≤ 1.5

HARDWARE

Dimensions 11.9 cm length, 7.6 cm width, 2.3 cm height
 (4.7" length, 3.0" width, 0.92" height)
 Weight 0.283 kg (0.625 lbs)
 Operating Temperature -55 °C to +85 °C (-67 °F to +185 °F)
 Altitude ≤16,764 m (55,000 ft)
 Finish Polyurethane enamel, fluid resistant
 Compliance ROHS
 Designed to DO-160E, ARINC 743 Footprint,
 RTCA DO-210D
 MTBF Airborne, per MIL-HDBK-217,
 at an ambient temperature of +70°C
 122,752 hours for Inhabited Cargo (AIC) environment
 70,501 hours for Uninhabited Cargo (AUC) environment

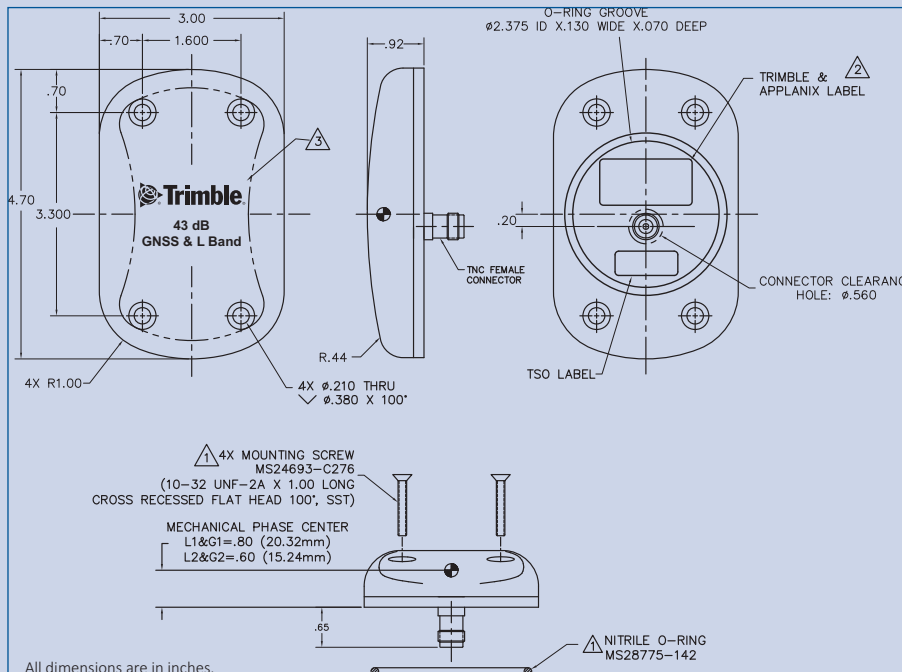

Specifications subject to change without notice.

© 2014, Trimble Navigation Limited. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. Maxwell is a trademark of Trimble Navigation Limited. All other trademarks are the property of their respective owners. 11/2014

AMERICAS
 TRIMBLE NAVIGATION LIMITED
 Integrated Technologies
 510 DeGuigne Drive
 Sunnyvale, CA 94085 USA
 +1-408-481-8000 Phone
 Email: americasales-intech@trimble.com

EUROPE & MIDDLE EAST
 TRIMBLE NAVIGATION LIMITED
 Integrated Technologies
 Germany
 +49 (6142) 2100-348 Phone
 France
 +33 2 28 09 3800 Phone
 Email: emeasales-intech@trimble.com

CHINA
 TRIMBLE NAVIGATION LIMITED
 Integrated Technologies
 Email: chinasales-intech@trimble.com

ASIA - PACIFIC
 TRIMBLE NAVIGATION LIMITED
 Integrated Technologies
 Email: asiasales-intech@trimble.com

RUSSIA
 TRIMBLE NAVIGATION LIMITED
 Integrated Technologies
 +49 (6142) 2100-348 Phone
 Email: rusales-intech@trimble.com