





TW126 Mid-Power 1.2 to 1.8 GHz 25dB In-line Amplifier

The TW126 is a low cost, rugged, waterproof, low noise, low power, 1.2 to 1.8 GHz band, 25dB gain in-line amplifier, specially designed to amplify all GNSS frequency signals, from GPS L2 to GLONASS L1. The TW126 provides for much longer cable runs from antenna to receiver, for applications such as mast-mount, large vehicle and timing systems, without degradation of system sensitivity.

The TW126 passes DC supply from input to output to support centre conductor DC supply to the antenna, therefore not requiring an additional Bias source and a bias-T.

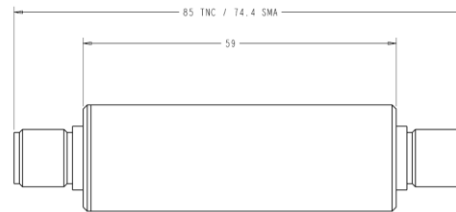

Applications

- GPS/GNSS Signal Repeaters
- All GNSS Signals – GPS, GLONASS, Galileo & SBAS
- Commercial, Industrial and Military Telematics Systems
- Wireless and Telecom Timing and Synchronization Applications

Features

- Very low noise
- Wide input voltage 4.75 to 10 VDC
- Cylindrical nickel-plated brass, IP67 compliant housing
- Powered via antenna coax from receiver
- 50 Ohm port impedance
- Available SMA, TNC or N-Type jack connectors
- RoHS and REACH compliant

Benefits

- Improves signal reception
- Enables extended cable runs
- Avoid installation of costly low-loss cable
- Fits in line with antenna cable
- No external DC power supply required
- Easy to install - mounting clamp included



TW126 Mid-Power 1.2 to 1.8 GHz 25dB In-line Amplifier

Specifications

Vcc =5.0V, over full bandwidth, T=25 °C

Electrical

• Gain	25 dB +/- 0dB typ.
• Noise Figure	1.5 dB max.
• Bandwidth	1.2 to 1.8 GHz
• Input VSWR	1.5 typ. / 2 max.
• Output VSWR	1.5 typ. / 2 max.
• Reverse Isolation	>35 dB
• Output 1dB	10 dB
• Output IP3	20 dBm
• Supply Range voltage	4.75 to 10 VDC
• Supply Current	50 mA typical

Mechanicals & Environmental

• Mechanical Size	2.5" L x 0.787" Dia. (63.5 mm L x 20 mm dia.)
• Connectors	SMA Jack, TNC Jack or N-type (Max TNC connector Torque 6.1 in-lbs)
• Operating Temp. Range	-40 to +85 C
• Enclosure	Nickel plated brass
• Environmental	RoHS and IP67 compliant
• Warranty	One year – parts and labour

Ordering Information

• TW126 - 25dB gain Inline Amp with SMA Jack	32-0126-00
• TW126 - 25dB gain Inline Amp with TNC Jack	32-0126-01
• TW126 - 25dB gain Inline Amp with N- Type	32-0126-14 (premium applies)

Please contact Tallysman Wireless for additional information

Tallysman Wireless Inc

106 Schneider Road, Unit 3
Ottawa ON K2K 1Y2 Canada
Tel 613 591 3131
Fax 613 591 3121
sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2010 Tallysman Wireless Inc. All rights reserved.

Rev 2.1